Sheetfeeding

AbbeyScreen Data Sheet 190DP/150D EE

(V2 Issue date: January 2026)

The Power of Less®

AbbeyScreen

Data sheet: Order grade: 190DP/150D (EE)

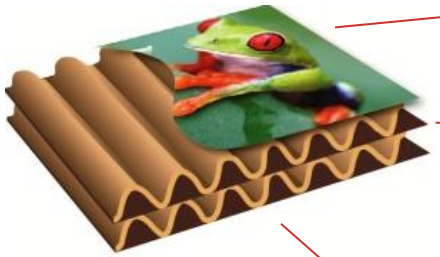

Top liner: Clay coat applied to a virgin fibre pure white Kraft board (Calliper:182 Mic/ Gloss TAPPI 75°: 35% +/- 5.00 %)

Double wall (EE), Double wall contains two (E) flute profiles and an additional centre liner. All Flute and centre liner manufactured from 100% recycled paper. The Double (E) flute combination provides a balanced combination and the top clay coated liner is fully supported to assist printability.

Reverse Liner: White Top Test (100% recycled) liner

Material content: Recycled content 71.4%/Virgin content 28.6%

Private & Confidential © 2013

AbbeyScreen

Technical details

Material Calliper: 3000 microns

Weight: 636g (+/- 5%)
ECT: 7.83 (Kn/M)
Burst: 1235 (Kpa)

Fluting & centre/liner; made from 100% waste-based (recycled) material and is 100% recyclable. Other heavier enhanced flutes are available as optional extra depending upon the performance requirements of the material. *(Note: As Fluting weights increase then so does the rigidity of the flute tips that can have an influence on the print & conversion results depending upon the process used).*

Material surface suited for Digital, Screen and offset litho inks
MOQ: 1000m2

Other Flute profiles available in this grade: EB / NE / B / E / F / N

Material is completely 100% recyclable as an unprinted grade

Corrugated materials working to a circular Economy using resources time and time again