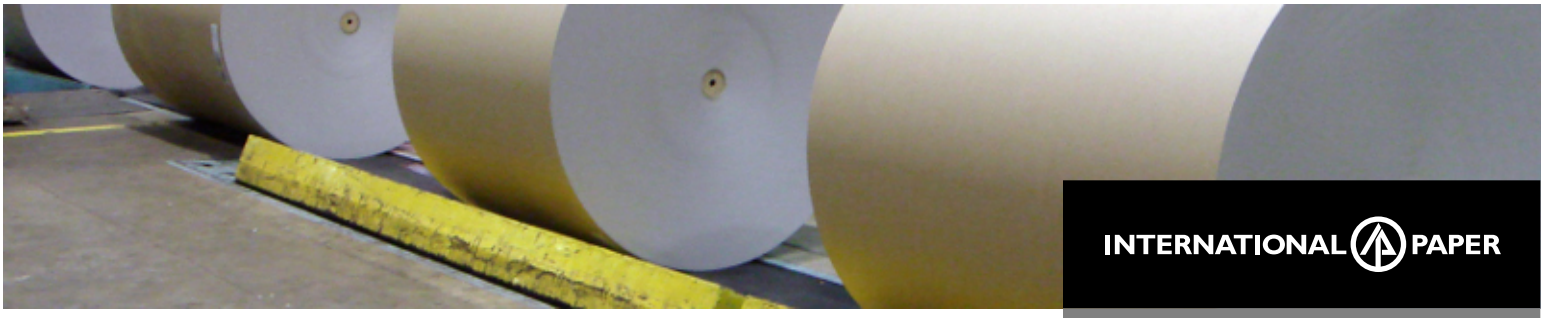


INTERNATIONAL PAPER

Technical Data Sheet

Di Pro 350gsm

Parameters	Standard	Unit	Measurement
Substance	ISO 536	g/m²	350 +/- 10
Thickness	ISO 534	µm	350 +/- 7
Bulk	ISO 534		1,0
Moisture Content	ISO 287	%	4,5 +/- 0,6
Smoothness	ISO 5627	Bekk sec	75 +/- 10
Formation	Kajaani	Kajaani index	110
Whiteness	ISO 11475	CIE	168 +/- 2
Brightness D65	ISO 2470-2	%	112 +/- 1
Opacity	ISO 2471	%	Min 99
Stiffness MD	ISO 2493	m/N	2150 +/- 50
Stiffness CD	ISO 2493	m/N	1300 +/- 40

Production sites:

The production mills operate in complience with the following standards

ISO 14001 ENVIRONMENT

ISO 9001 QUALITY

Special Attributes:

ISO 9706 ARCHIVING

FSC certified product

EU Ecolabel certified product

References:
Product is made taking into account requirements of DIN EN 12281
Product made from ECF Pulp
ISO 45001 - Health & Safety

The data presented can be changed without notice.

International Paper EMEA
Chaussée de la Hulpe 166
1170 Brussels, Belgium
Tel.: +32 2 774 1211
Fax: +32 2 774 1299

Extract date: 10.03.2020